

Section 25

Rigging

Procedures

Procedures covered in this section:

Review all prints and follow all details of this section thoroughly. Although many details may repeat previous instructions given throughout this manual, we feel that this is absolutely necessary to stress the importance of the rigging procedures.

Cards used in this section:

None

Prints used in this section:

Review all prints.

Templates used in this section:

None

Tools required for this section:

Adjustable wrench 10"	Dial indicator with	Pliers	Screwdrivers	Yardstick
Allen wrenches	magnetic base	Protractor level	Straight edge	
Belt tension tool	Drift punch	Ruler	Tape measure	
Dial calipers	Mallet	Spring Scale	Torque wrench	

Ratchet with sockets of the following sizes: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 11/16", 3/4", 7/8"

Wrenches of the following sizes: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 11/16", 3/4", 7/8"

RIGGING: TAIL BOOM (E09-2000)

The purpose of the tail boom is to hold the trim fins and the tail rotor in the desired location. If the trim fins and tail rotor are not in the proper location and set at the correct angle, the helicopter will not respond correctly in flight. To have the best stability, the following angles and distances must be correct:

1. The angle of the top of the tail boom should be 2-1/2 degrees more than the angle of the square drive tubes of the airframe.
2. The horizontal trim fin chord line should be parallel with the top of the tail boom.
3. The vertical trim fin chord line should align 15" to 16" to the pilot side from the center of the main rotor shaft.

Photo #1

To verify that the chord line of the horizontal trim fin is parallel with the top of the tail boom, measure the thickness on both the leading and trailing edge. Divide each measurement by 2 to find the distance from the top of the fin to the chord line at that point.
Example:

Leading edge: $.980" \div 2 = .490"$

Trailing edge: $.088" \div 2 = .044"$

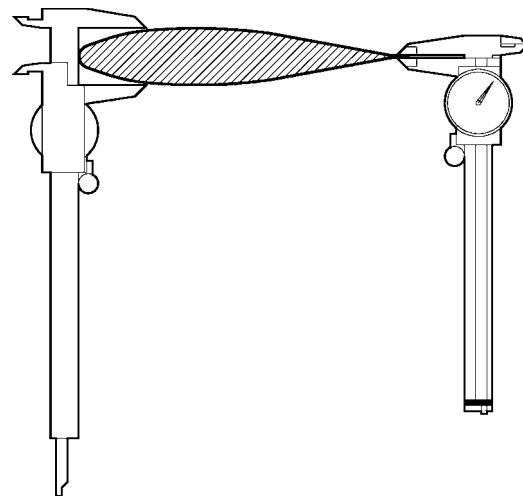
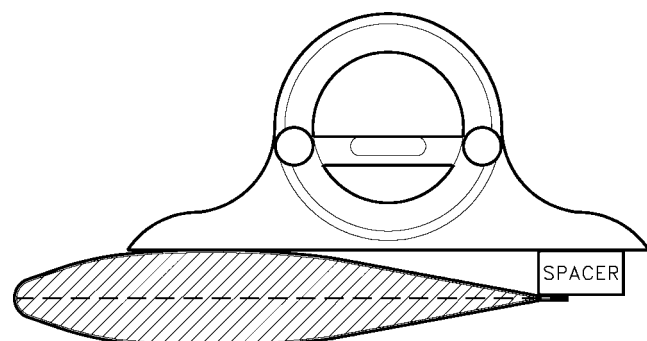


Photo #2

Subtract the smaller number from the larger.
Example:

$.490" - .044" = .446"$

Sand or grind a small piece of wood to that thickness, to be used as a spacer. Place the spacer on the trailing edge. Rest the protractor level on the leading edge and on the spacer. The protractor is now parallel with the chord line of the fin. Check that the chord line is parallel with the top of the tail boom.



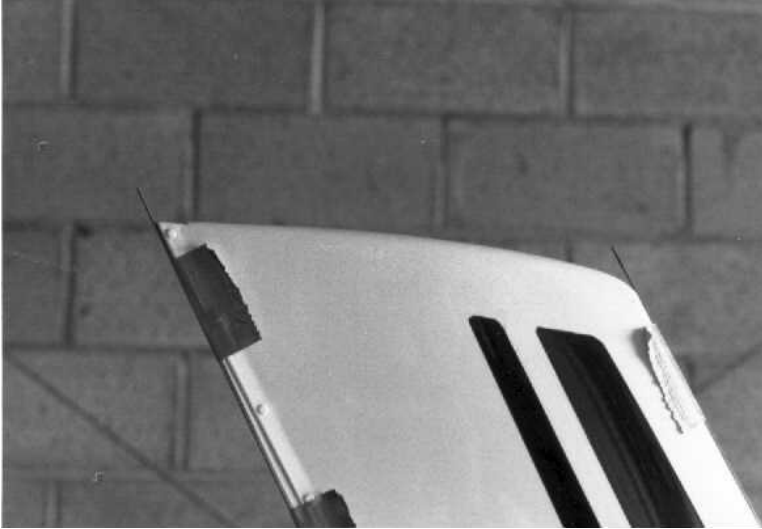


Photo #3

To verify that the vertical trim fin is at the correct angle, tape a piece of welding rod on the front and rear of the fin, extending about 1".

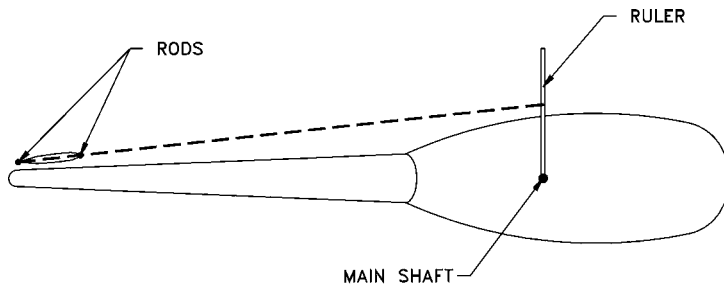


Photo #4

Sight across the welding rods from behind the ship. The rods should align 15-1/2" to the pilot's side of the main rotor shaft. Drawing shows top view of this procedure.

RIGGING: CYCLIC CONTROL (E14-2000)

The purpose of the cyclic control is to maintain the balance of the helicopter when it is in the air by tipping the swash plate to the correct angle in reference to the main rotor shaft. If the angles are not within the specified range of travel, the sensitivity of the control will be affected, possibly to the extent of being unable to control the helicopter. The angles that will give the pilot the best control throughout all maneuvers are as follows:

1. Total travel from the left to the right stops should be 52 degrees, with equal number of degrees both directions from the center.
2. Total travel from the rear to the front stop should be 52 degrees, with the rear stop set for pilot comfort.

Photo #5

Set the protractor to read 26 degrees and place it on the side of the cyclic handle. Move the cyclic to the left until the bubble centers.



Photo #6

Adjust the stop bolt so it makes contact with the cross shaft.

Note: If 26 degrees cannot be achieved, remove the jam nut from the bolt for more travel. Use one or more flat washers under the head of the bolt and tighten the bolt against the washer(s). Use Loctite to prevent the bolt from loosening.



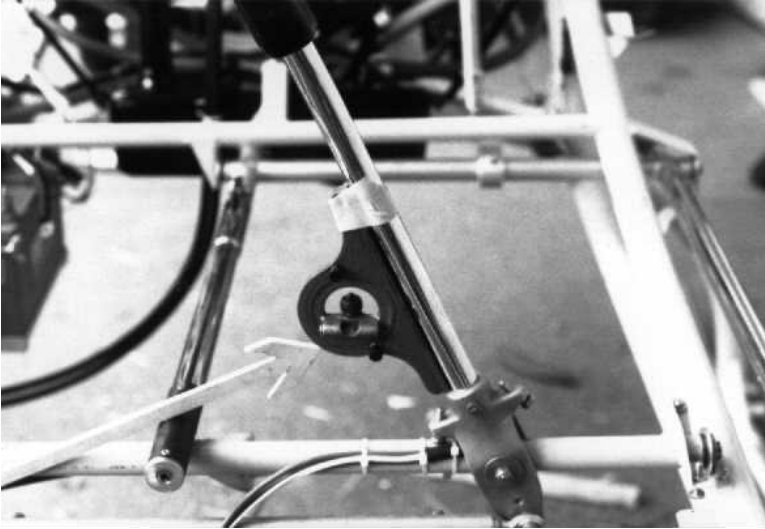


Photo #7

Set the protractor level to read 26 degrees in the other direction, leaving it in place on the side of the cyclic. Move the cyclic to the right until the bubble centers.



Photo #8

Adjust the stop bolt so it makes contact with the cross shaft.

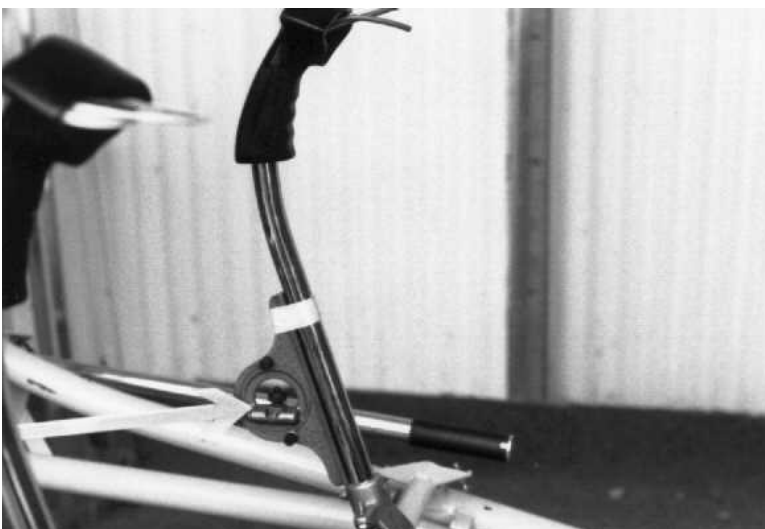


Photo #9

Set the protractor level to read 26 degrees and place it on the rear of the cyclic stick. Move the cyclic to the rear until the bubble centers.

Photo #10

Adjust the rear stop bolt against the stop bracket.



Photo #11

Set the protractor to read 26 degrees in the other direction and move the cyclic forward until the bubble centers.



Photo #12

Adjust the forward stop bolt against the forward stop bracket.



RIGGING: COLLECTIVE CONTROL (E15-2000)

The purpose of the collective is to control the amount of pitch on the main rotor blades and the amount of throttle on the engine, which determines how much lift you have to work with. To obtain the best control of both items (pitch of blades and throttle), the collective control must be set up as follows:

1. The collective control must have freedom of movement throughout its full range of travel, from the bottom of the pocket in the floor pan to where it contacts the airframe bracket. The handle should travel approximately 16 inches.
2. The throttle is checked by placing the collective in the full down position and twisting the throttle from stop to stop. Throttle roll should be approximately 143° . The throttle transfer rod should rest on the stops at each end of travel. With throttle in the fully closed position, the "B" control arm (pilot's side) should be 17 to 18 degrees in reference to the collective cross shaft. There should be no binding of the throttle linkage through the full range of movement of the collective handle.
3. With the collective in the full down position and throttle fully closed, the throttle position reading on the digital display should read 0%. Raise the collective without twisting the throttle. The throttle position should remain 0% throughout the full range of travel. With the collective in the full down position and the throttle fully open, the digital display should read 70%. Raise the collective to mid-point without twisting the throttle. The display should read 100%.
4. 100% throttle should be available at hover pitch of main rotor blades (5 to 6 degrees or approximately 1/2 to 2/3 collective stick travel).
5. There should be NO throttle opening with collective handle full up and throttle full off.
6. Main rotor blade pitch throughout full travel should not exceed 11 to 11-1/2 degrees total movement. Example: If negative pitch is 2 degrees then positive pitch should be 9 to 9-1/2 degrees.

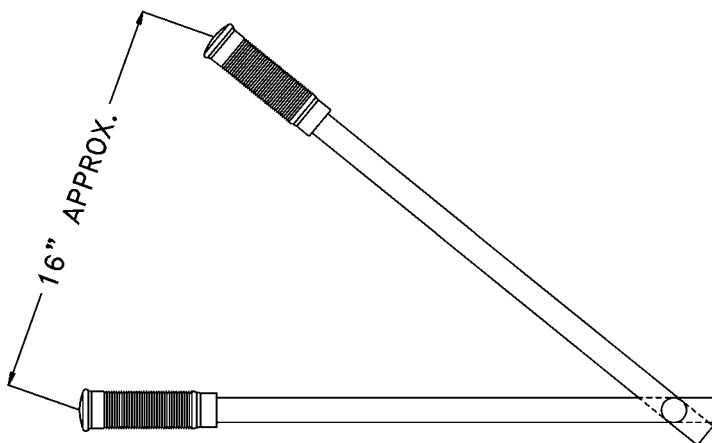


Photo #13

The collective should travel approximately 16 inches from full down to full up position. It must have freedom of movement throughout its full range of travel, from the bottom of the pocket in the floor pan to where it contacts the airframe bracket.

Photo #14

Both the eye bolt on the control arm and the aluminum clevis on the throttle cable must be able to pivot freely without binding.

With the collective in the full down position and the throttle rolled off, the 3/16 hole in the eye bolt should be 1" to 1-1/16" from the rear of the collective cross shaft, as shown on print E15-2000. Start with 1/8" minimum between the end of the cable housing and the aluminum clevis. These are the initial settings. Changes can be made as necessary by adjusting the nuts on the cable housing and/or adding or removing washers on the eye bolt to get the correct throttle correlation.

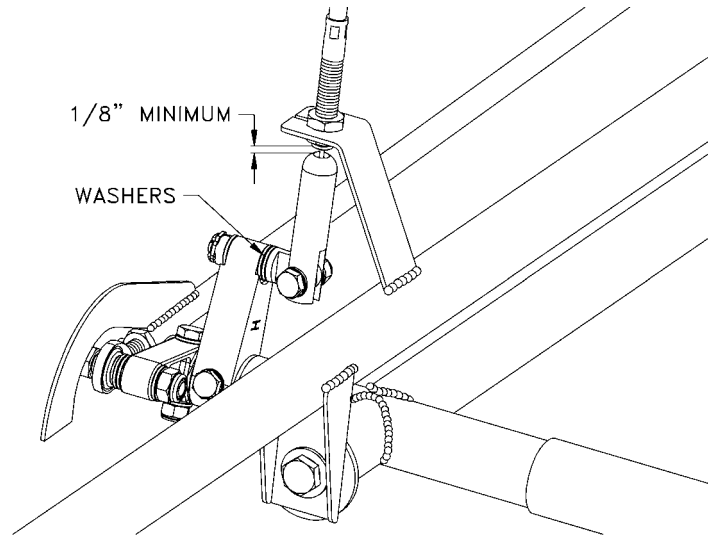


Photo #14A

With the collective in the full down position, twist the throttle from stop to stop. Throttle roll should be approximately 143°.

With throttle in the fully closed position, both stops should make contact at the same time. The "B" control arm (pilot's side) should be 17 to 18 degrees in reference to the collective cross shaft. Use the triangular template to verify the angle. (See Section 10.)

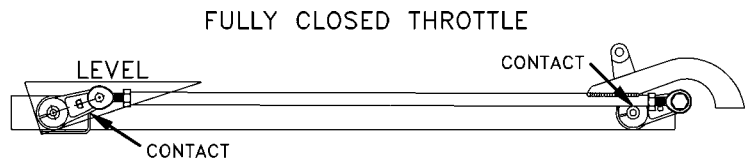


Photo #14B

With the collective in the full down position and throttle fully open, both stops should make contact at the same time. There should be no binding of the throttle linkage through the full range of movement of the collective handle.

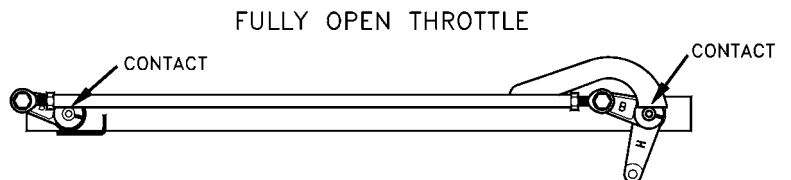


Photo #14C

The FADEC digital display can be used to check correlation of the collective and throttle. With the collective in the full down position and throttle fully closed, the throttle position reading on the digital display should read 0%. Raise the collective without twisting the throttle. The throttle position should remain 0% throughout the full range of travel.

Note: If 0% throttle opening cannot be maintained throughout full range of collective travel, there may be too much travel and an upper limit stop may need to be added. This stop can be attached to the collective bracket on the pilot's side of the airframe.


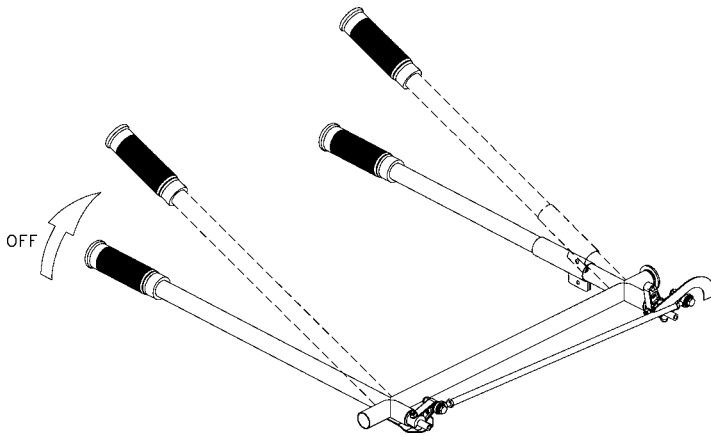


Photo #14D

With the collective full down and throttle rolled ON, throttle position on the digital display should be about 70%. Raise the collective to mid point without twisting the throttle. Throttle position should increase to 100%.

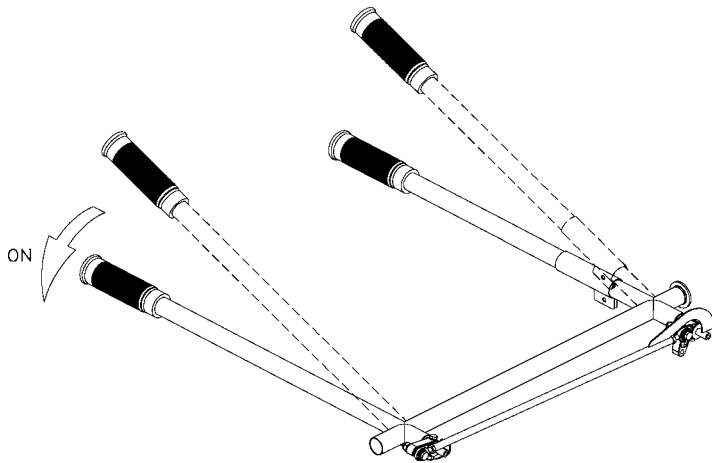

RIGGING: DIRECTIONAL CONTROL (E16-2000)

The purpose of the anti-torque pedals is to control the pitch of the tail rotor blades. Changing the pitch on the tail rotor controls which way the helicopter will turn. To have enough control in all maneuvers and power settings, set the pedal travel as follows:

1. The anti-torque pedal control should have freedom of travel from stop to stop with the push/pull cable traveling 2-7/8".

Photo #15

These are the stop bolts used to set the travel of the pedals.

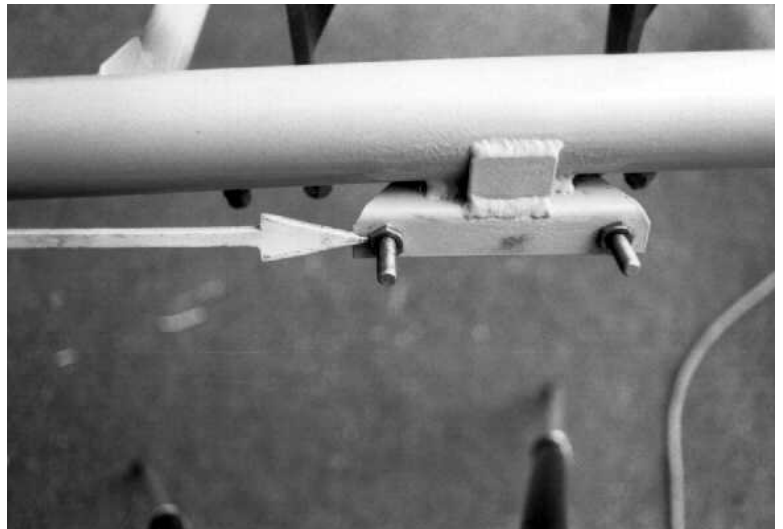


Photo #16

Push the left pedal to the stop.

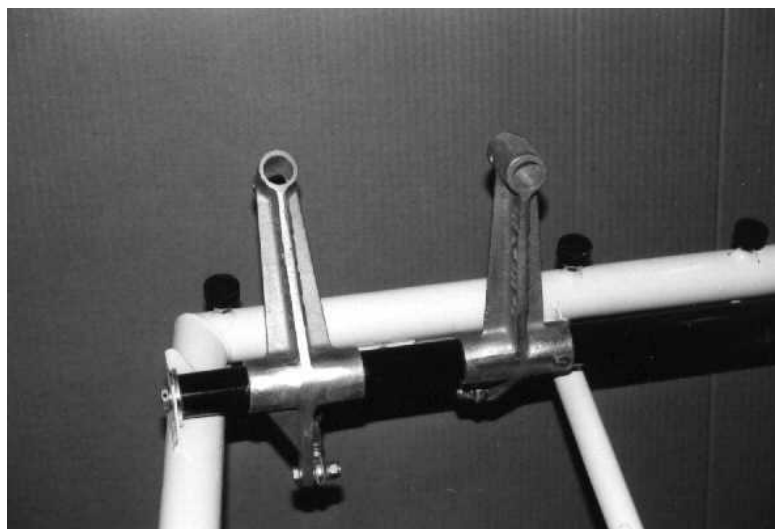




Photo #17

The tail rotor directional control cable should move forward.

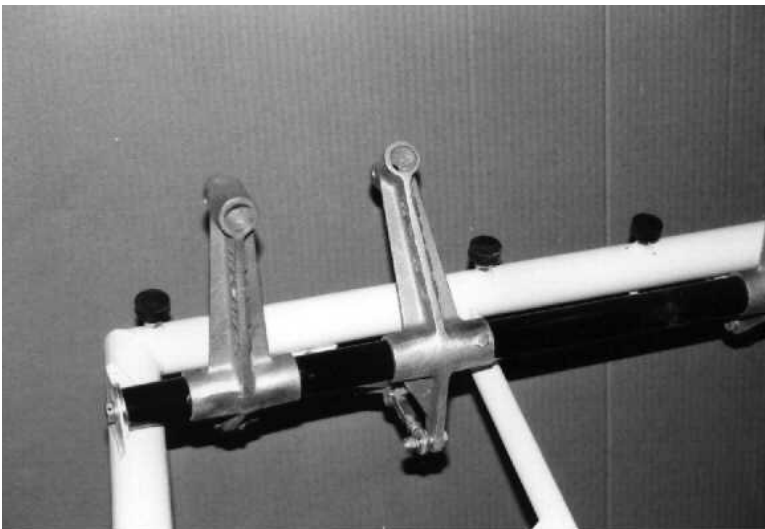


Photo #18

Push the right pedal to the stop.

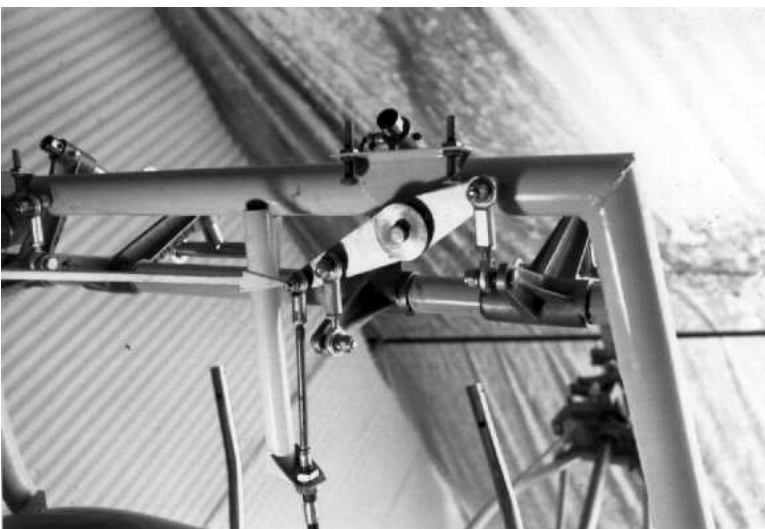


Photo #19

The tail rotor directional control cable should move to the rear. The total travel of the cable should be 2-7/8".

RIGGING: TAIL ROTOR (E17-2000)

The purpose of the tail rotor is to counter the effect of torque. If the tail rotor does not work properly, the helicopter will turn as soon as it becomes light on the skids and there will be no way to stop it. Follow these steps when rigging the tail rotor:

1. The key on the tail rotor shaft should extend the same amount out of the slider at each end of travel of the pedals.
NOTE: To prevent a lock up, the key must not extend more than 5/16" out of the slider.
2. When the right pedal is against the stop, set the pitch on the tail rotor at 24 degrees positive pitch with the barrel 90 degrees to the shaft.
3. When the left pedal is against the stop, set the pitch on the tail rotor at 8 degrees negative pitch with the barrel 90 degrees to the shaft.
4. The rod end on the pitch horns should be centered over the 3/8" bolt holding the barrel to the shaft.
5. The ratio between the tail rotor and main rotor blades is 5 revolutions of the tail rotor to 1 revolution of the main rotor.

Photo #20

The rod end on the pitch horn must be centered over the 3/8" bolt that holds the barrel to the shaft. Use washers if necessary to achieve this alignment. If more than 4 washers are required to position these rod ends, contact RotorWay.

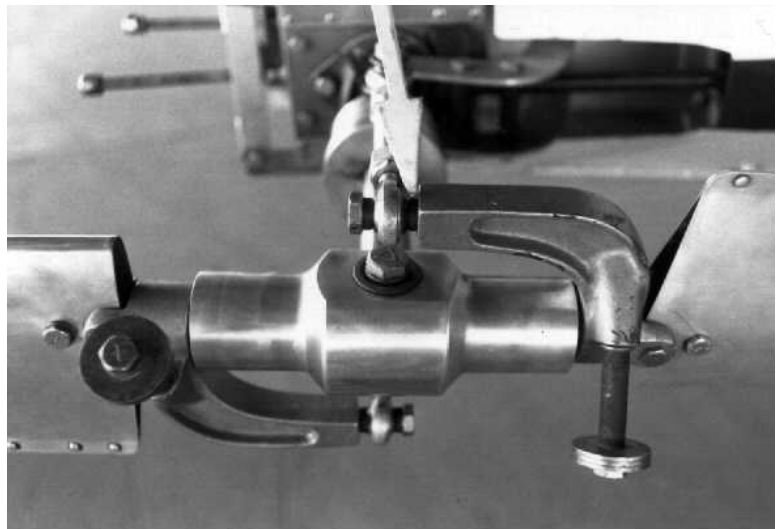


Photo #21

The key must not extend out of the slider more than half of its length (5/16").

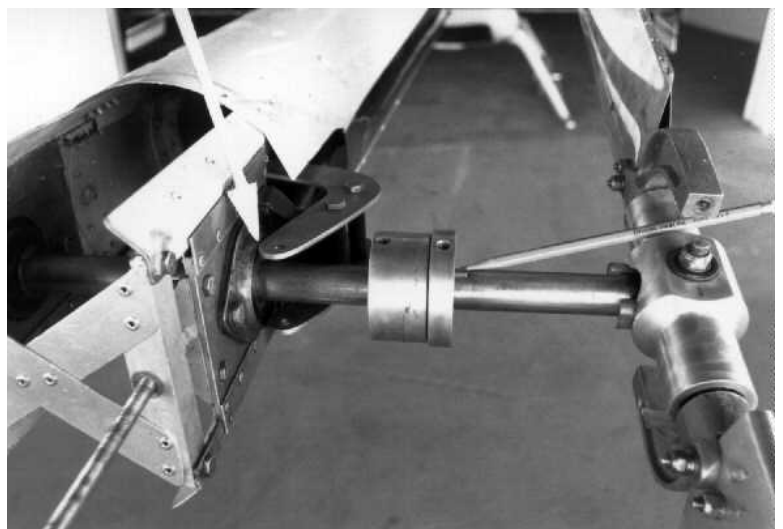




Photo #22

When the left pedal is against the stop, the tail rotor should have an 8 degree negative pitch. Use the tail rotor template and protractor level when setting the pitch.



Photo #23


When the right pedal is against the stop, the tail rotor should have a 24 degree positive pitch. Use the tail rotor template and protractor level when setting the pitch.

RIGGING: TAIL ROTOR DRIVE (E18-2000)


The purpose of the tail rotor drive is to keep the tail rotor turning at the correct RPM. If the tail rotor drive is not installed and adjusted correctly, the pilot cannot correct for torque and maintain control of the helicopter. When rigging the tail rotor drive do the following:

1. Check to insure that the idler pulley mounting scissors at bulkheads #2 and #3 can pivot freely.
2. Belt installation: Fully loosen the nuts on the all-thread adjustment rods so that the belts are not under any tension while being installed. NEVER install a belt by rolling it into place over the edge of a pulley while under tension, as this can damage the belt internally.
3. Initial tensioning: Check the tail rotor drive belt tension at the front of the #1 tail boom bulkhead. Push the belt with the belt tension tool until it indicates 10 pounds. Use a ruler to check the distance that the belt moves. Adjust until the belt deflects 1-3/8 inch at 10 pounds. Do not over-tighten the belts.

Marks on the tension tool:

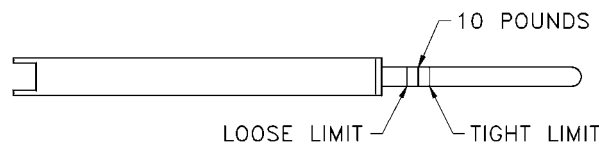

Tension tool reading 10 pounds:



To adjust the belts, first loosen the rear 1/4" bolts on the tail rotor shaft bearing flanges. Then turn the 5/16" nuts on the all-thread rods. (Clockwise will tighten the belts.) When the belts are at the correct tension, re-tighten the 1/4" bearing flange bolts.

Check the rear drive belt tension by inserting the tool in the small hole towards the rear of the tail boom on the passenger side. Push up against the belt until the tool indicates 10 pounds. The tool must not make contact with the tail boom skin or an inaccurate reading may result. Holding this position, make a reference mark on the tool at the edge of the hole. When checking belt tension in the future, push the tool against the belt until the reference mark aligns with the edge of the hole. The tool must indicate between the tight and loose limit marks.

4. Belt replacement label: Once the correct initial tension has been attained, apply the belt replacement label to the upper tail rotor slider stringer on the pilot's side. Align the "NEW BELT" mark on the label with the rear edge of the bearing mounting plate. If the bearing mounting plate reaches the "REPLACE" mark during subsequent adjustments, this is an indication that the belts have stretched beyond a safe limit. BELTS THAT HAVE STRETCHED MORE THAN ONE INCH SINCE INITIAL TENSIONING MAY BE DAMAGED INTERNALLY AND MUST BE REPLACED IMMEDIATELY, REGARDLESS OF THE NUMBER OF HOURS THEY HAVE BEEN USED.
5. Temperature strips: Install temperature strips on the two tail rotor idler pulleys and the drive pulley on the tail rotor shaft. The heat sensitive "dots" will darken if the indicated temperature is exceeded. (See Section 13.) Examine the temperature strips before and after each flight. If the 170° dot darkens, it is an indication that a belt may be slipping or some other problem may exist. The problem should be identified and corrected before continuing flight. IF THE 180° (OR HIGHER) DOT DARKENS, THE BELTS HAVE BEEN DAMAGED FROM HEAT AND MUST BE REPLACED.
6. Belt "break-in" period: Upon installing new belts, check and adjust the tension every 15 minutes that the engine is running (idle or operating RPM) until no further adjustment is required. New belts will stretch rapidly during this time, and it is very important to prevent them from becoming too loose. A belt that is too loose could be damaged internally by rolling over the edges of the pulleys; it can also be damaged by the heat created from excessive slipping. ANY BELT THAT HAS ROLLED MAY BE DAMAGED INTERNALLY AND MUST BE REPLACED IMMEDIATELY TO PREVENT BELT FAILURE.
7. The belts and pulleys should be kept clean and free of any oil, dirt or other contamination. Use acetone and a clean cloth (the cloth should be damp, not dripping with acetone).

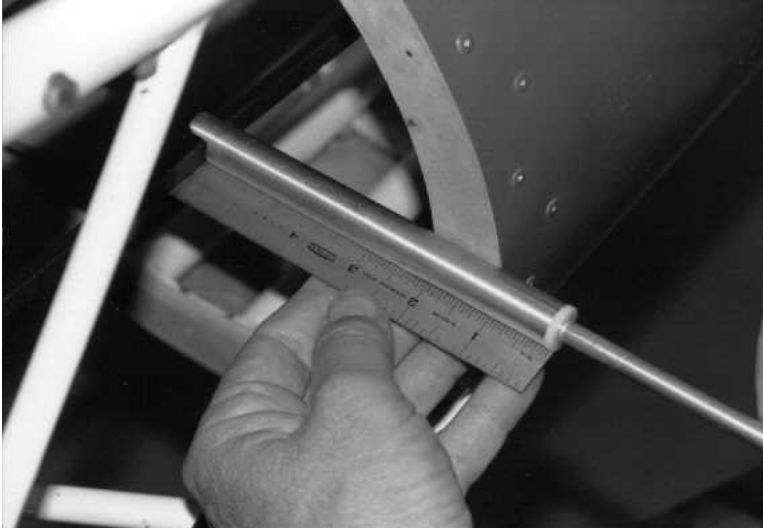


Photo #24

Using the tension tool at the first bulkhead, push the belt until a 10 pound reading is observed. The belt should deflect 1-3/8 inches.

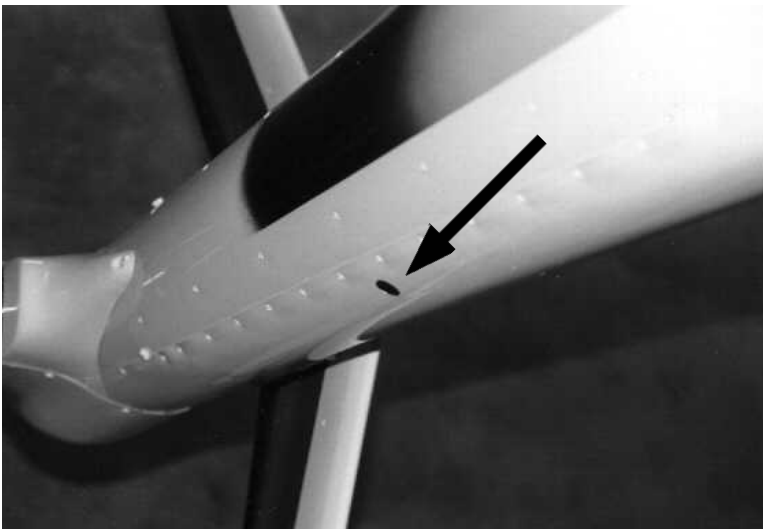


Photo #25

This photo shows the location of the hole in the bottom of the tail boom, passenger side, used for checking tension of the rear belt.

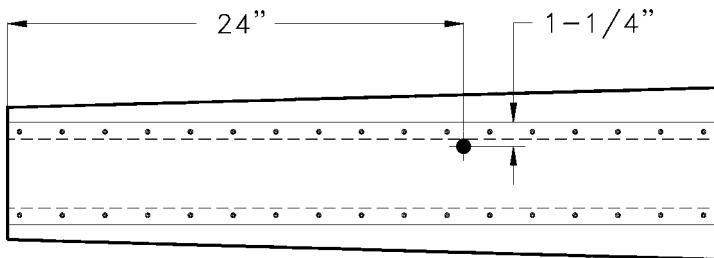


Photo #26

If this hole is not already in the bottom of your tail boom, measure 24" from the rear (with the fiberglass tail cone cover removed) and 1-1/4" over from the edge of the tunnel cover. Start by drilling a small hole, and gradually enlarge the opening with a file or grinder. Be very careful not to drill or cut into the stringer underneath. Make the hole just large enough for the tension tool to fit through, about 3/4" diameter.

Photo #27

Insert the tool into the hole and push the belt until a 10 pound reading is observed. (The tool must not make contact with the tail boom skin.) Holding this position, make a reference mark on the tool at the edge of the hole (as shown by the arrow).

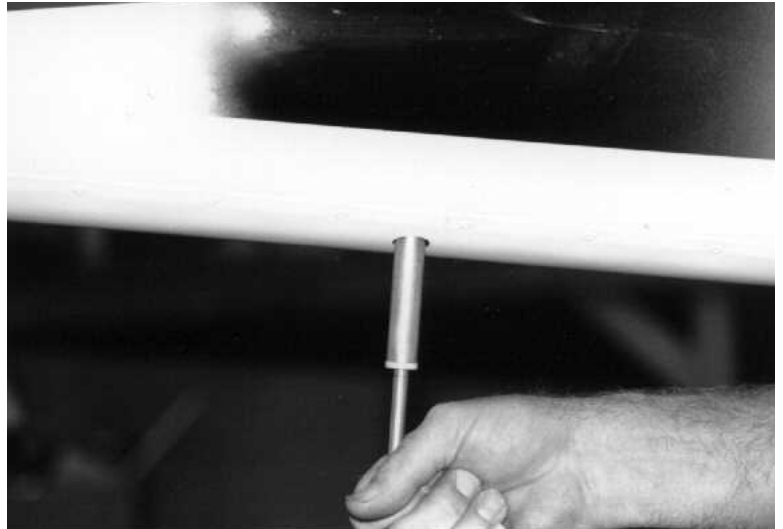


Photo #28

This shows the reference mark on the tool. At all subsequent belt tension checks, push until the reference mark aligns with the edge of the hole. The tool must indicate between the tight and loose limit marks.



Photo #29

After tensioning the belts, apply the belt replacement label to the upper tail rotor slider stringer on the pilot's side. Align the "NEW BELT" mark on the label with the rear edge of the bearing mounting plate. If the bearing mounting plate reaches the "REPLACE" mark during subsequent adjustments, the belt MUST be replaced.



RIGGING: MAIN ROTOR BLADES (E20-2000)

The main rotor blades are the wings which lift the helicopter and pull it in the direction that you are flying. When the two blades are made the same and are adjusted so they lift the same amount, the helicopter is a smooth flying machine. Rig the rotor system as follows:

1. The rotor hub plate must be shimmed correctly on the main rotor shaft. Center of the outboard pitch pins and the center of the main rotor shaft must be in a straight line to within .0005". (Total Indicated Reading of .001".)
2. The main rotor shaft should be 90 degrees to the ground in all directions.
3. Center of the 9/16" retention bolt should be within 1.985" to 1.990" from the leading edge of the rotor blades.
4. Thrust blocks should be installed correctly on the rotor hub.
5. Both rotor blade chord lines should be level, with the control rod disconnected.
6. Both rotor blades should be the same weight.
7. Both pitch horns should be mounted to the retention strap the same.
8. Set the pitch on the rotor blades using the control rods, with the swash plate 90 degrees to the main rotor shaft. With the collective full down, both blades are set at 1-1/2 degrees negative pitch.
9. Check the pitch on the main rotor blades when the collective is in the full up position. The positive pitch should be 9-1/2 degrees positive.
10. The teeter travel must be between 14 and 15 degrees total movement.

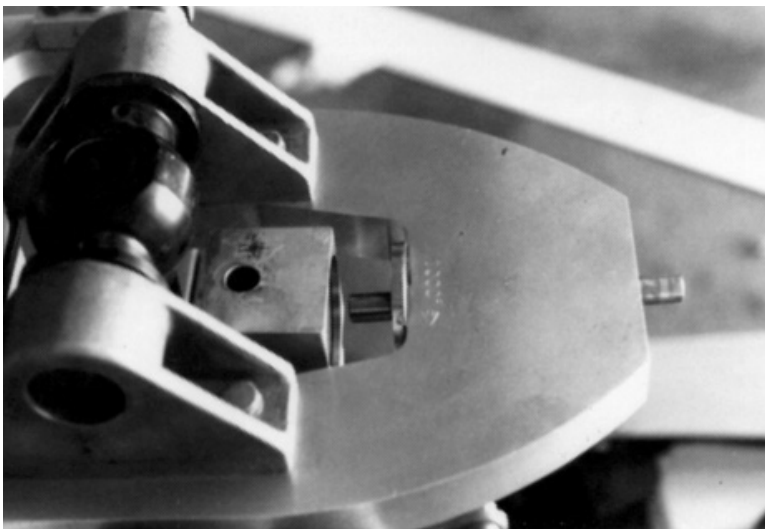


Photo #30

To mount and adjust the main rotor blades, do the following: clean the pitch pins (inboard and outboard) and apply a thin coat of grease. Install the thrust blocks with the master block on the end of the hub with the serial number.

Photo #31

Check fit to inside of hub.

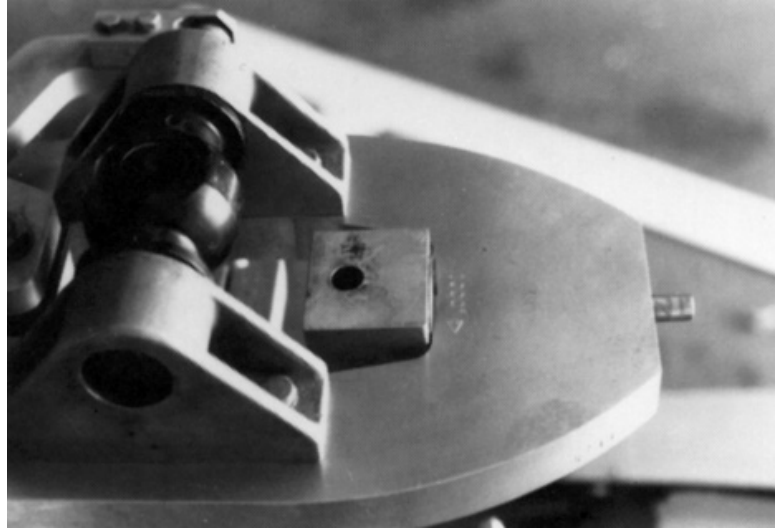


Photo #32

Line up the aligner block bearing (on the blade) with the outboard pitch pin, and slide the blade in place to install the 9/16" retention bolts. The blades must be held in the pre-coned position and not allowed to droop until both 9/16" bolts are tightened. Force the blades outward before tightening the 9/16" bolts to ensure that the thrust block is seated properly.

Note: After the first blade is in place, rest it on a ladder while the second blade is being installed.

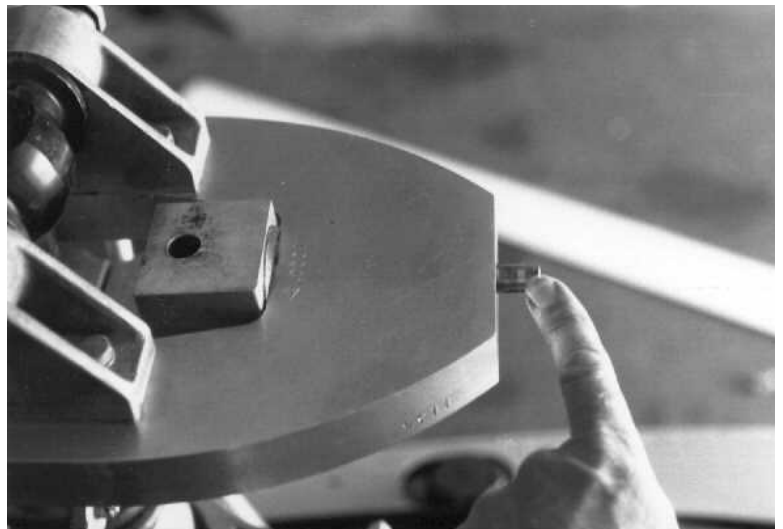


Photo #33

The rotor hub should be level laterally. If necessary, shim under the skids to level the hub. When the rotor blades are hanging unsupported on the hub, they must feather freely or it will be impossible to do a static lead/lag adjustment. If the blades do not feather freely, observe the gap between the aligner block bearing and the end of the hub plate. This gap should be approximately .040". The gap can be reduced by tapping the blade inward. Position the blade in the coning angle before tapping inward.



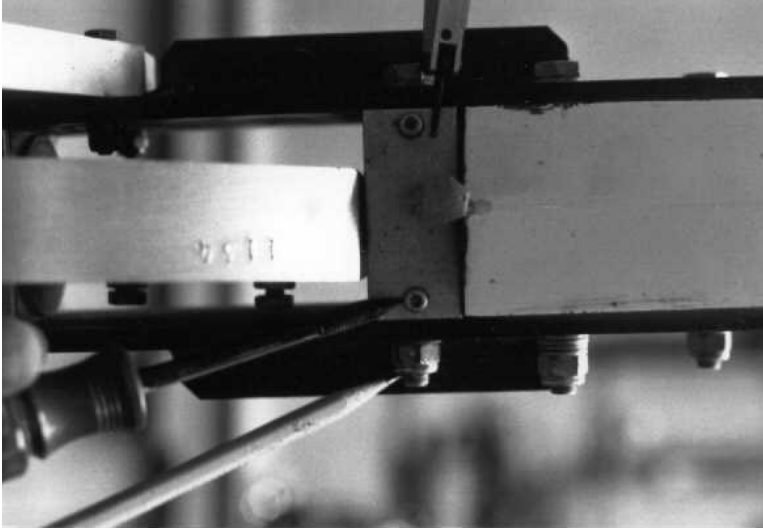


Photo #34

Loosen the 5/16" aligner block bolts and the allen screws. Use the all thread 1/4" bolt to level both blades. The blade sweeps on the 9/16" retention bolt and pivots on the inboard and outboard pitch pins. When the blade is aligned with the pitch pins, it will level itself if it is free to pivot on the pitch pins.

Note: If during lead/lag adjustment the blade does not feather freely, it may be necessary to re-seat the thrust block as in photo #32 and tap the blade inward as in photo #33. Be sure to have the blades in the coning angle while doing this.

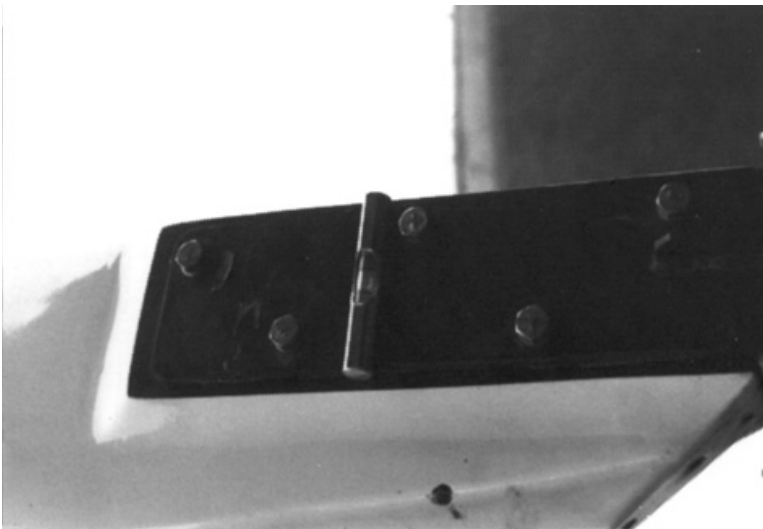


Photo #35

The slave blade is level when the blade is aligned with the pitch pins.

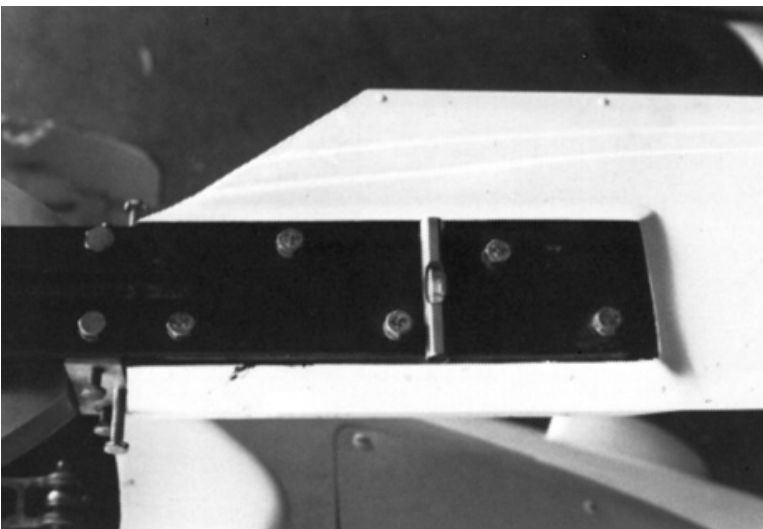


Photo #36

The master blade is level when the blade is aligned with the pitch pins.

Photo #37

The hub plate, master blade and slave blade should be level when all the bolts are tight and the static lead/lag balance is done correctly.



Photo #38

To check to see if both main rotor blades are the same weight, replace the 3/8" bolts in the teeter block with 1/4" bolts one at a time and remove the snap ring on the main drive pin to allow the hub to teeter freely.

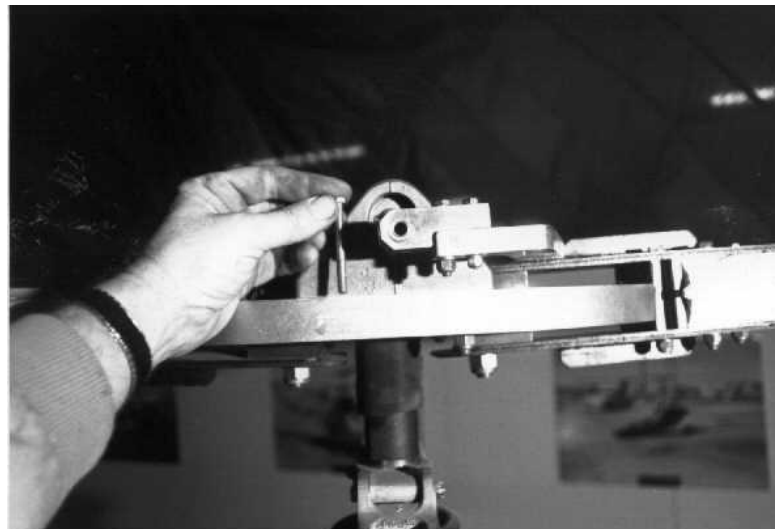
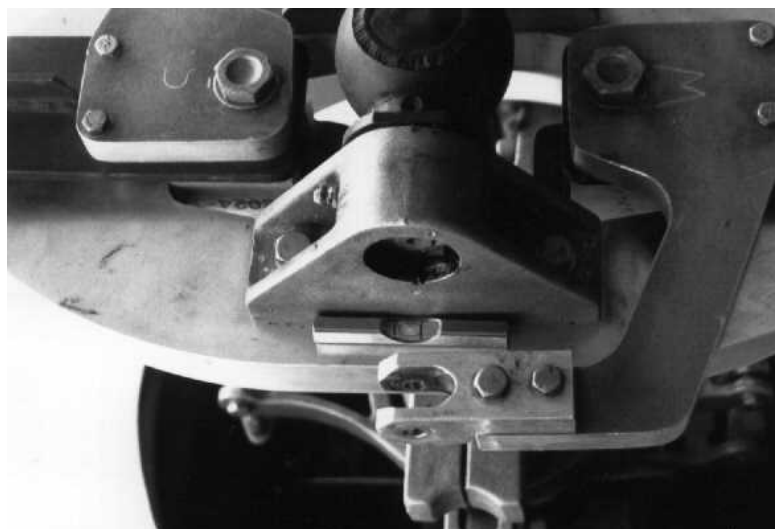


Photo #39

Place the level on the hub plate under the main drive pin so the weight of the level will not affect the balance of the blades.



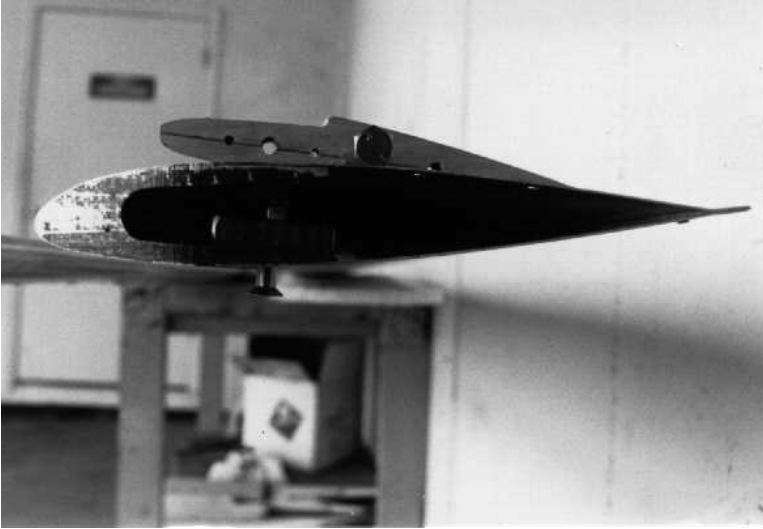


Photo #40

Remove weight from the tip weight in the heavier blade until the bubble on the level centers. Be sure the wood end caps and their screws are on the ends of the blades when balancing. Teeter the blades a few times and see if they balance each time. This will ensure a good balance.

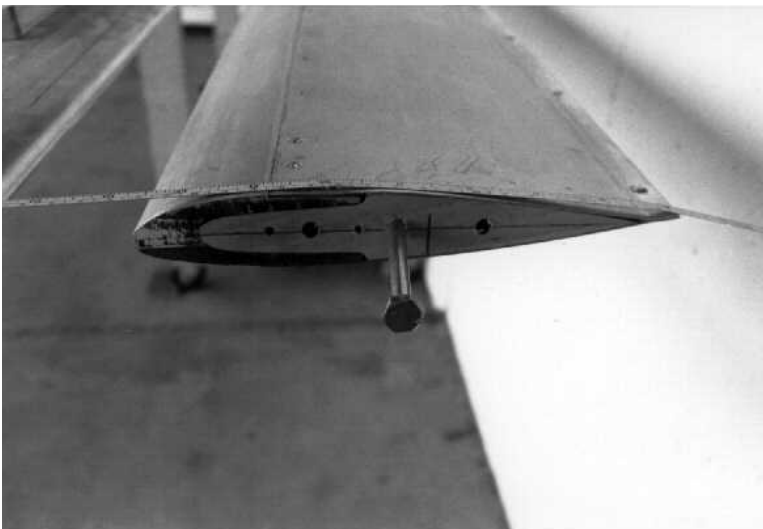


Photo #41

When the balance is correct, install the tip plugs in the end of the blades, securing them with 3M 2 part epoxy adhesive, also called "blade glue" (found on E33 CARD 1F) and wood screws. Remove the 1/4" bolts and re-install the 3/8" bolts in the teeter blocks one at a time. Re-install the snap rings on the main drive pin.

Note: Use a long 1/4" bolt in the vent hole of the tip plug for easier installation.



Photo #42

To locate the position for the pitch horns do the following: Grind the end of a long 5/16" bolt to a point and install it in the pitch horn clevis. Raise the pitch horn until you can align the point of the bolt with the center of the drive pin. Rotate the pitch horn if necessary to achieve this alignment.

Photo #43

Install the control rods and adjust them so that the swash plate, rotor hub and both rotor blades are level.

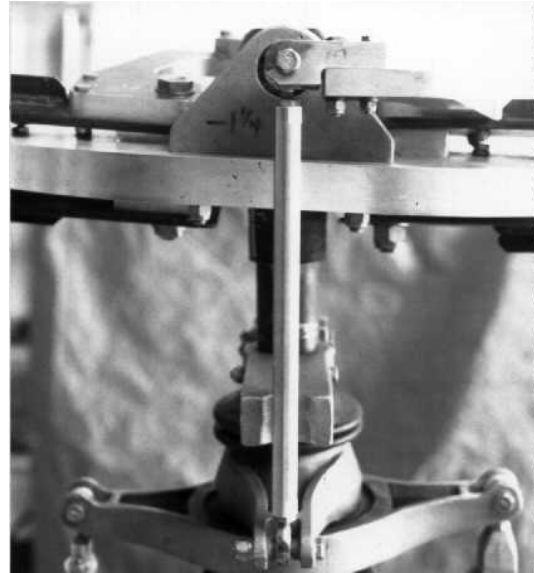


Photo #44

Slide the rubber collar down as far as possible and check the distance between the main rotor shaft and the control rods. Both sides must be equal. When all items in photos #42 and #43 are correct, the pitch horn is in the correct position. Use the holes in the pitch horns to locate and drill the two 3/16" holes in the straps.

Note: If the pitch horns are set correctly, the pitch of both blades will be the same from full down to full up collective.




Photo #45

When setting the pitch on the rotor blade, the rotor hub and swash plate must be level.

Collective down both blades: 1-1/2 degrees negative pitch.

Collective up both blades: 9-1/2 degrees positive pitch.

The collective and cyclic controls should not interfere with each other throughout travel.

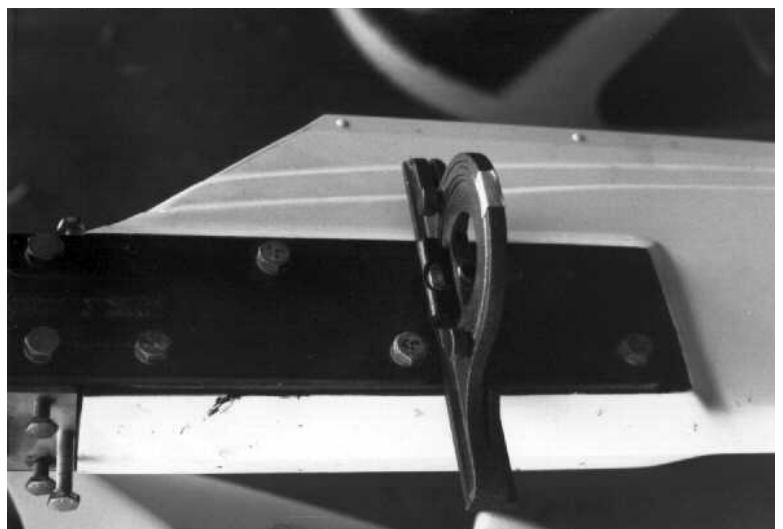

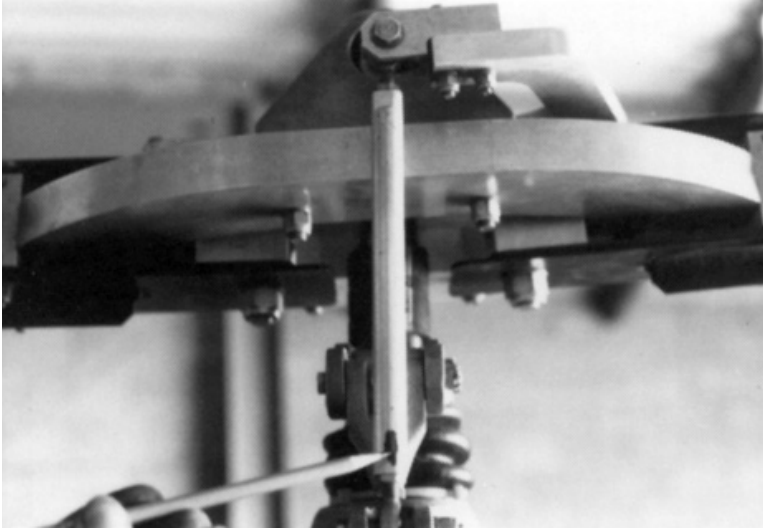


Photo #46

It may be necessary to change the track setting to make the blade track while turning, due to the aerodynamics of the airfoils. Make a tracking stick by taping a piece of rubber hose to a small diameter wooden dowel. Grease the hose and raise it until it makes contact with the turning blades (2 strikes minimum), 18" from the tip. Mark the control rods and turn 1/4 turn per adjustment, until both blades hit the tracking stick rubber.

Note: Avoid more than 4 adjustments of 1/4 turn to one blade. It may be necessary to adjust the opposite control rod to maintain proper positive and negative pitch range.

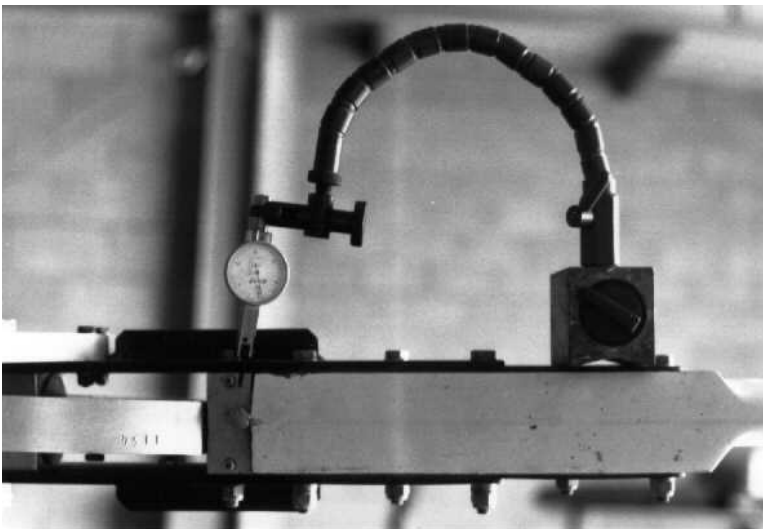


Photo #47

Before attempting the dynamic lead/lag adjustments, make sure that the static adjustment is correct. In most cases a level chord line will give best results. It may be necessary to change the static lead/lag adjustment to make the rotor balance while turning.

When changing the lead/lag on the dynamic test, set up the dial indicator as shown, with magnetic base on the longest steel strap and the indicator point on the aligner block. Move .002" per adjustment. Loosen the 5/16" lock bolts and set screws and turn the 1/4" all thread.



Photo #48

Use the reflex template and duck bill pliers to change the trailing edge angle for track adjustment to maintain track and smoothness in forward flight. Note: A more precise method of adjusting the trailing edge is to use a dial indicator mounted on the reflex edge fixture, available from the parts department. Detailed instructions are provided with the fixture.

RIGGING: MAIN DRIVE BELTS

The main drive belts turn all the rotating parts in the helicopter. If the belts are dirty or loose, they will slip and the parts will not turn at the correct speed. When this happens, the helicopter will not fly. To get the desired results from the main drive belts, do the following:

1. The belts and pulleys should be clean. Use acetone and a clean cloth (the cloth should be damp but not dripping with acetone).
2. Be sure the pulleys are properly aligned.
3. Be sure the belts are at the proper tension. **CAUTION:** Do not over tighten the belts. Achieve the correct tension and adjust as necessary to maintain the correct tension.

Photo #49

Level the secondary pulley by shimming under the skids.

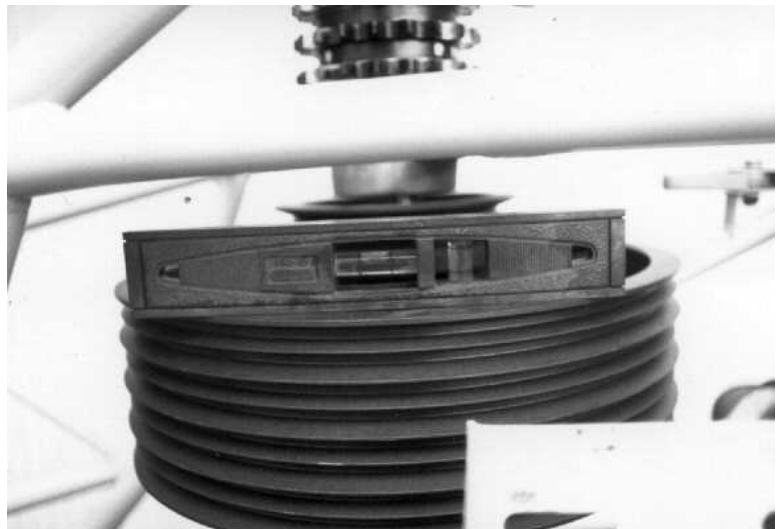


Photo #50

Level the engine flywheel by moving the top and/or bottom of the engine.

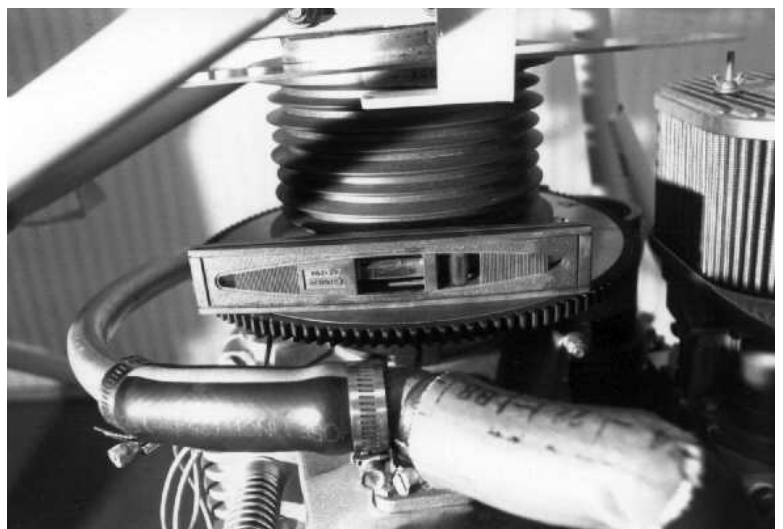




Photo #51

Mark the side of the engine pulley .200" from the top on both sides of the aircraft. This is necessary because the top of the pulley has approximately .200" more material above the belt grooves than the secondary pulley.



Photo #52

Place a straight edge on top of the secondary and idler pulley. The straight edge should be even with the mark on the engine pulley. The pilot's side is the tension side of the pulley, so if you have to choose one side to be perfect, use the pilot's side.

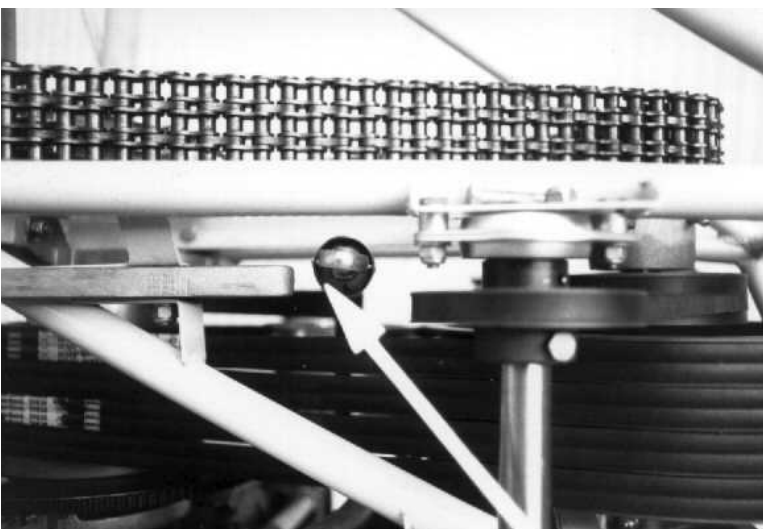


Photo #53

Remove the bolt that holds the rod end to the clutch arm casting.
Note: It is important to maintain clearance between the clutch tube and the square drive tube.

Photo #54

Move the idler pulley away from the belts.



Photo #55

The belts are tensioned by moving the engine forward. Apply 7 lbs. of pressure to one drive belt on the pilot side, it should move 1/2". The idler should not be touching the belts when making this test. When the clutch is engaged, the piston in the spring tube should move 1". Be sure the pivot arm bolt and the piston and the springs in the spring tube have been greased.



RIGGING: SWASH PLATE

The swash plate is a disc that when tipped at an angle to the main rotor shaft (by cyclic control), makes the main rotor blades tip to the same angle. The swash plate tips the main rotor blades in different attitudes to maintain balance of the helicopter in flight. When rigging the swash plate, do the following:

1. All angles of the swash plate are set in reference to the main rotor shaft.
NOTE: Use shims under the skids until the main rotor shaft is 90 degrees to the ground both fore/aft and laterally.
2. When the cyclic handle is against the forward stop, the swash plate must tip 5 degrees down in the front, in reference to the main rotor shaft.
3. When the cyclic handle is against the rear stop, the swash plate must tip 5 degrees down in the rear, in reference to the main rotor shaft.
4. When the cyclic handle is against the left stop, the swash plate must tip 5 degrees down on the left, in reference to the main rotor shaft.
5. When the cyclic handle is against the right stop, the swash plate must be 5 degrees down on the right, in reference to the main rotor shaft.
6. Adjust the bias of the cyclic controls as described in this section.



Photo #56

The cyclic control cables shown installed in the cable mount casting.

Photo #57

The cyclic control cables have been adjusted to the control "T". Notice the rod end is to one side of the opening.

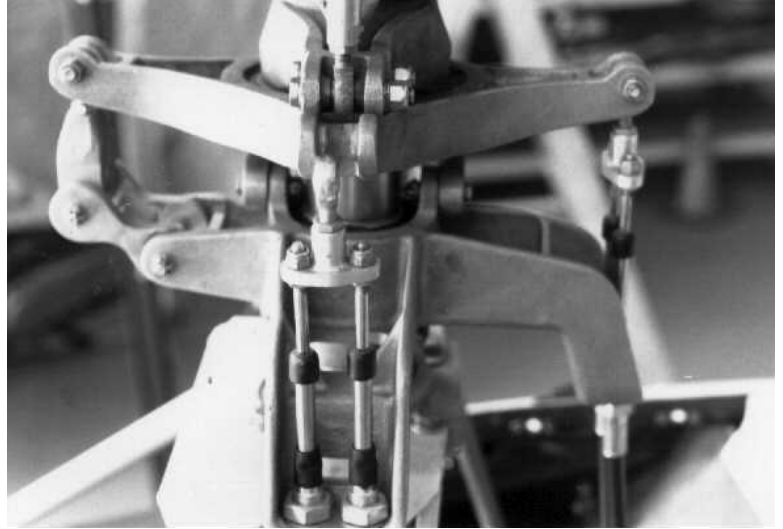


Photo #58

Using a spring scale, pull 4 lbs. to align the rod end with the slot of the swash plate to give the correct bias in the control cables.

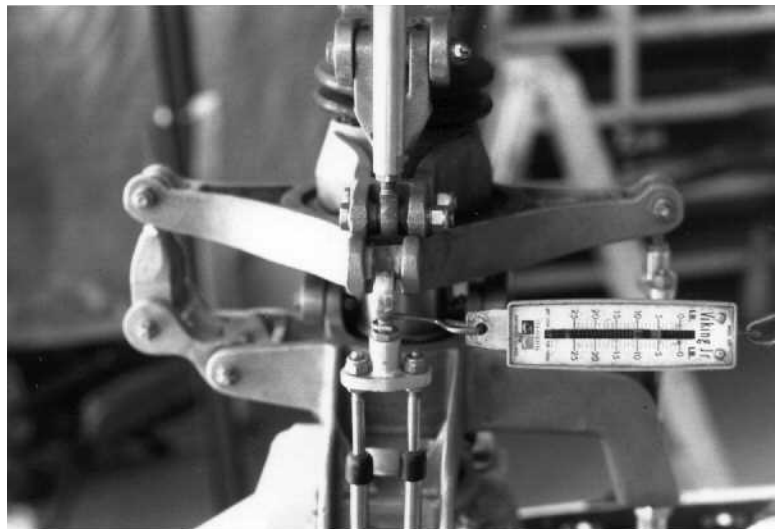


Photo #59

When the correct bias is achieved on the cyclic control cable, install the rod end in the swash plate opening.

Note: Set the bias of both fore/aft and lateral cables using this method.





Photo #60

When setting the swash plate angles, the main rotor shaft must be 90 degrees to the ground. Put two 5/16" bolts in the holes and place a straight edge on them. Set the protractor level 5 degrees and set it on the straight edge. Center the cyclic fore/aft and against the left stop.



Photo #61

Adjust the rod end indicated by the arrow until the bubble centers.



Photo #62

Set the protractor to 5 degrees in the other direction and place it on the straight edge. The cyclic control should be centered fore/aft and against the right side. The bubble should center; if it does not, the ratio of the cyclic and swash plate is off. Check the moment arm of the casting at each end of the cables. (The moment arm is the distance between the pivot point and the attachment point.)

Photo #63

Remove the long bolts and rotate the swash plate to check the fore/aft angles. Install the long bolts and straight edge. Set the protractor to 5 degrees and place it on the straight edge. The cyclic should be centered laterally and against the forward stop to set the angle.

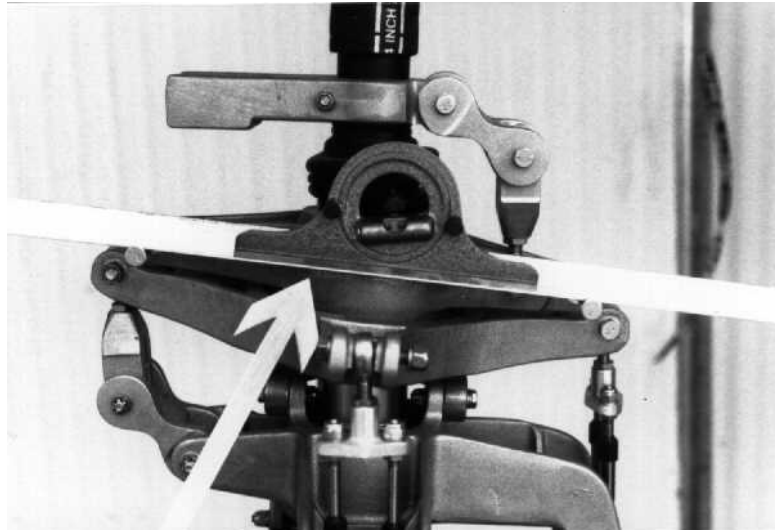


Photo #64

Adjust the rod until the bubble is centered.

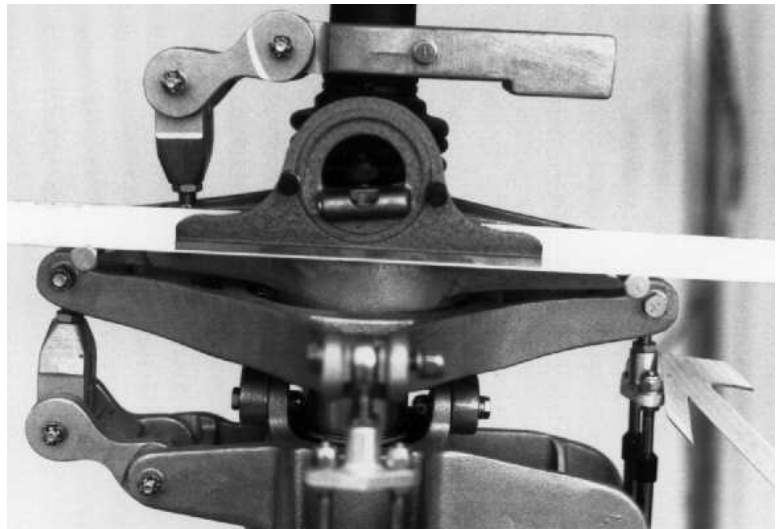


Photo #65

Set the protractor to 5 degrees in the other direction and place it on the straight edge. The cyclic should be centered laterally and against the rear stop. The bubble should center. If it does not, the ratio of the cyclic and swash plate is off. Check the moment arm at each end of the control cables.

